


- 0) Before securing the catwalk, check that all shielding blocks that form the roof of the NML cave are in place and no personnel are on the shielding blocks. There should be no breaches in the shield barrier which could permit personnel access to the cave. If all shielding is intact begin the search and secure.
- 1) On the way to Interlock Box #1, "A" will need climb down on top of the shielding blocks on the north end of the hall to check the gaps between the catwalk and the shielding blocks, the black area.
- 2) "A" and "B" proceed to the north end of the catwalk to reset Interlock Box #1
- 3) "A" and "B" sweep the catwalk resetting Interlock Box #2.
- 4) "A" holds while "B" checks the stairway to reset Interlock Box #3 on the lower landing.
- 5) "A" and "B" continue to sweep the catwalk, closing the gate to the lower level and reset Interlock Box #4.
- 6) "A" and "B" continue to sweep the catwalk to reset Interlock Box #5 and control access out.

Reviewed AD/RSO	Date
<i>Madelyn Wotter</i>	5/11/17
Approved AD/OPS Dept. Head	Date
<i>Quinn Stewart</i>	5/5/17

See next page for Lower Level Map

CONTROLLED DOCUMENT

Users are responsible for ensuring they work to the latest approved revision. Printed or electronically transmitted copies are uncontrolled.

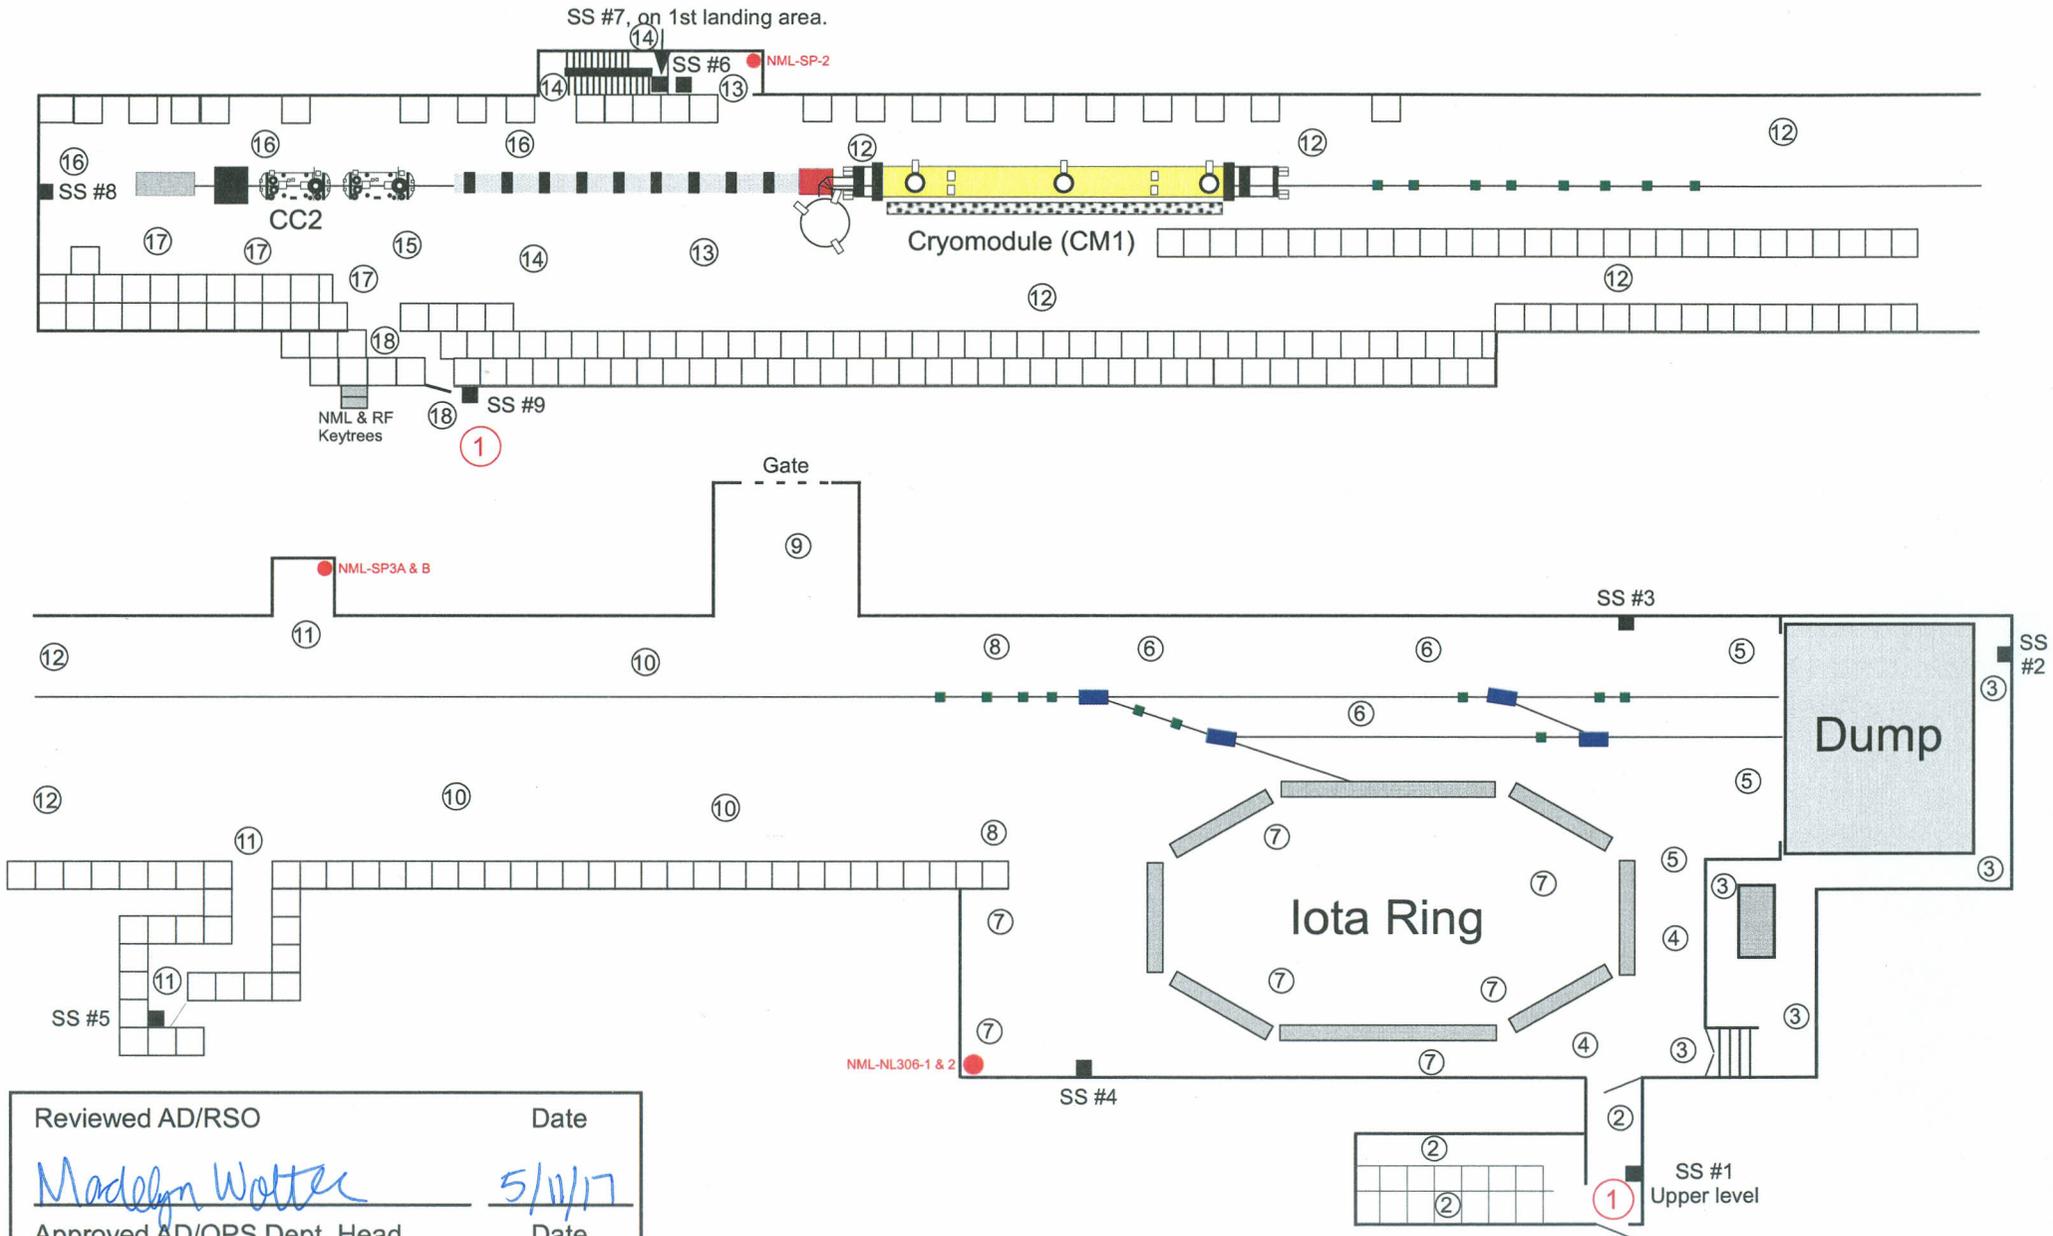

Reviewed AD/RSO	Date
<i>Madelyn Walter</i>	5/11/17
Approved AD/OPS Dept. Head	Date
<i>Steve Puchner</i>	5/5/17

See next page for Procedure

CONTROLLED DOCUMENT

Users are responsible for ensuring they work to the latest approved revision. Printed or electronically transmitted copies are uncontrolled.

- 1) "A" and "B" obtain keys from the keytree, then proceed downstream to the 2nd floor exit to reset Interlock Box #1.
- 2) "A" and "B" sweep the stairway going down to the lower level, especially checking behind the stairs at the ground level.
- 3) "A" holds while "B" checks the RAW area and behind the dump, especially between the dump and the west wall, then resets Interlock Box #2.
- 4) "A" and "B" split up, "A" takes the east/left side of the enclosure and "B" takes the right/west side.
- 5) "B" sweeps the area to reset Interlock Box #3.
- 6) "B" continues to sweep the area to hold at point 8.
- 7) "A" sweeps the area including inside the IOTA Ring to reset Interlock Box #4 and joins up with "B" at point 8.
- 8) "A" and "B" meetup and together they start sweeping the tunnel.
- 9) "B" checks the alcove verifying the gate is closed and locked.
- 10) "A" and "B" continue to sweep the tunnel.
- 11) "B" checks the alcove and holds while "A" sweeps the exit and resets Interlock Box #5.
- 12) "A" and "B" continue to sweep the tunnel.
- 13) "A" holds while "B" checks the sump alcove and behind the stairs, then resets Interlock Box #6.
- 14) "A" holds while "B" checks the stairway to reset Interlock Box #7.
- 15) "A" sweeps to the exit area and holds.
- 16) "B" continue to sweep the enclosure to reset Interlock Box #8.
- 17) "B" sweeps to join up with "A".
- 18) "A" and "B" sweeps on the way to exit the enclosure and resets Interlock Box #9 on the outside.

See previous page for map

Reviewed AD/RSO	Date
	5/11/17
Approved AD/OPS Dept. Head	Date
	5/5/17