AD Enclosure - MI-12B

Search and Secure Procedure

MI-12B

MI12B.V1.1

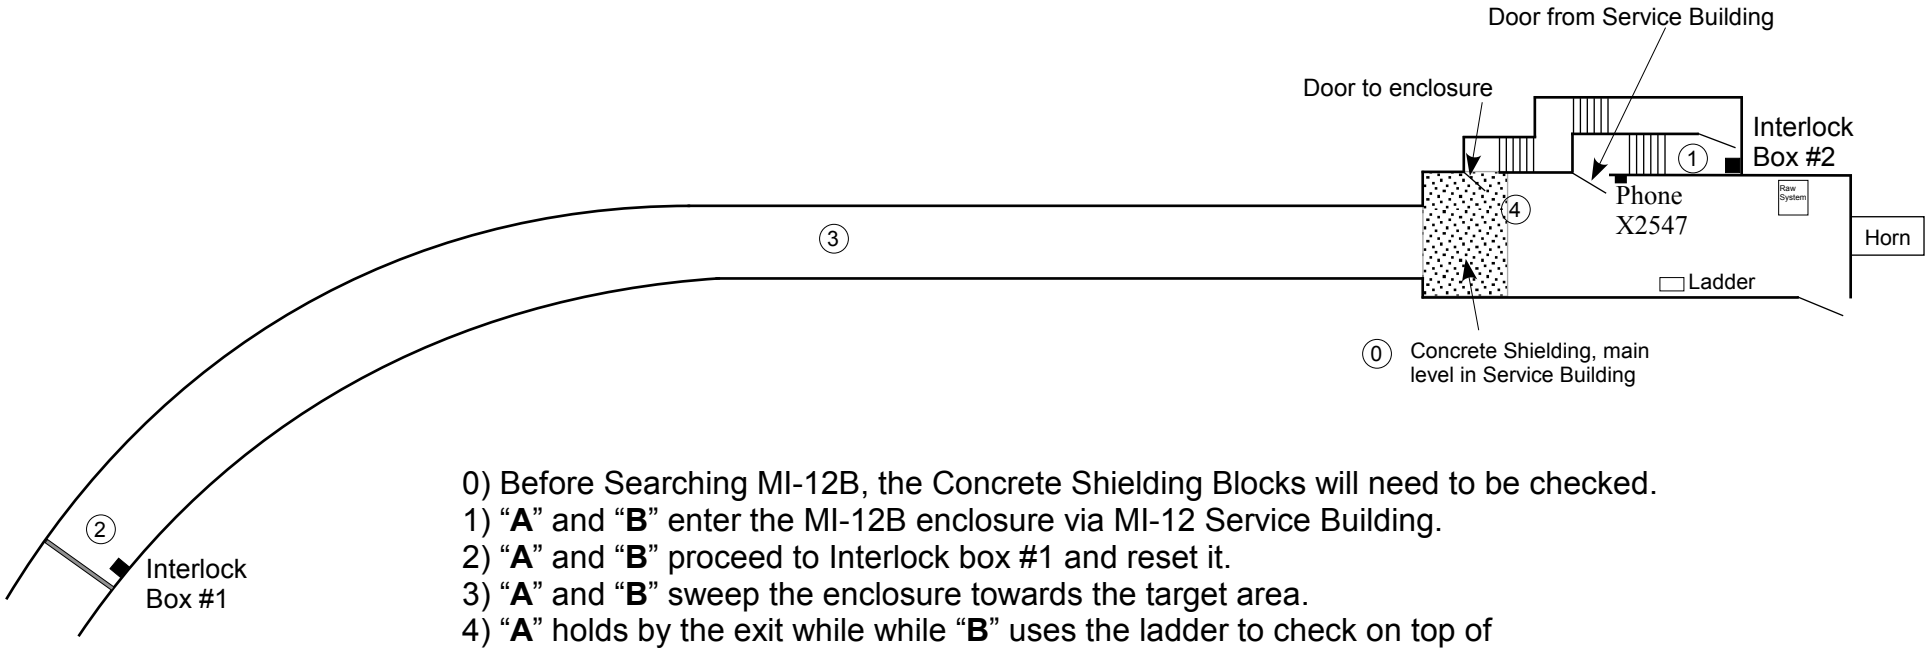

0) Before Searching MI-12B, the Concrete Shielding Blocks will need to be checked.
1) "**A**" and "**B**" enter the MI-12B enclosure via MI-12 Service Building.
2) "**A**" and "**B**" proceed to Interlock box #1 and reset it.
3) "**A**" and "**B**" sweep the enclosure towards the target area.
4) "**A**" holds by the exit while while "**B**" uses the ladder to check on top of the Horn area and the Raw system.
5) "**A**" and "**B**" exit and reset Interlock Box #2.

Reviewed AD/RSO	Date
Gary Lauten	1-30-13
Approved AD/OPS Dept. Head	**Date**
Daniel Johnson	2/1/13

CONTROLLED DOCUMENT
Users are responsible for ensuring they work to the latest approved revision. Printed or electronically transmitted copies are uncontrolled.