AD Enclosure - F Sector

Search and Secure Procedure

F Sector

FSector.V1.2

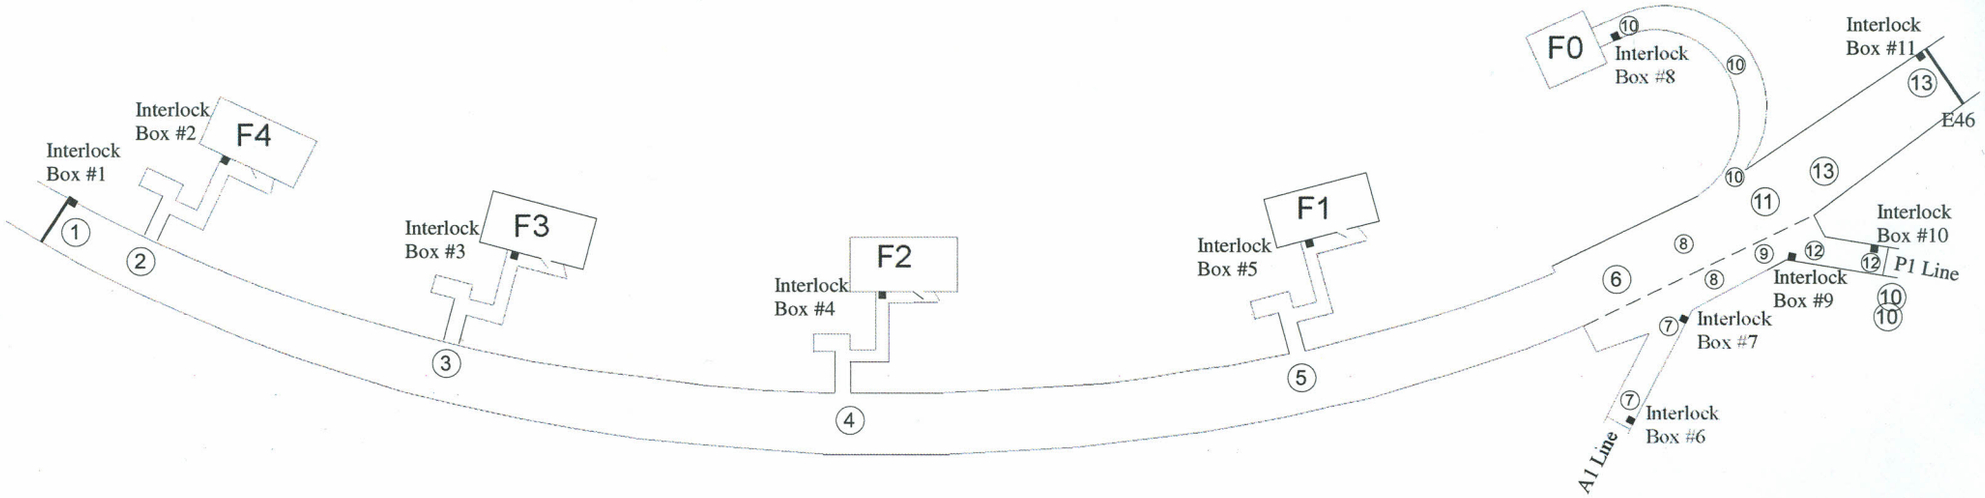

1) "**A**" and "**B**" reset Box #1.
2) "**A**" and "**B**" sweeps the tunnel to the next Service Building. "**A**" holds while "**B**" resets Box #2.
3) "**A**" and "**B**" sweeps the tunnel to the next Service Building. "**A**" holds while "**B**" resets Box #3.
4) "**A**" and "**B**" sweeps the tunnel to the next Service Building. "**A**" holds while "**B**" resets Box #4.
5) "**A**" and "**B**" sweeps the tunnel to the next Service Building. "**A**" holds while "**B**" resets Box #5.
6. "**A**" holds.
7. "B" sweeps the A1 Line spur and resets Interlock boxes #6 and #7.
   Note: Do NOT check the door to No Man's land, unless the area is dropped.
8. "**A**" and "**B**" sweep the F0 and the lower F0 tunnel.
9. "**B**" holds.
10. "**A**" sweeps the M.V.A. tunnel and resets Interlock box #8.
11. "**A**" holds.
12. "B" sweeps the P1 Line spur and resets Interlock boxes #9 and #10.
    Note: Do NOT check the door to No Man's Land, unless the area is dropped.
13. "**B**" joins "**A**", and they sweep the tunnel to the gate at E46 to reset Box #11, the head box.

Reviewed AD/RSO	Date
Gary Lauter	9/1/2015
Approved AD/OPS Dept. Head	Date
Daniel [illegible]	9/1/15

CONTROLLED DOCUMENT
Users are responsible for ensuring they work to the latest approved revision. Printed or electronically transmitted copies are uncontrolled.